



# Deliberated Domain Bridging for Domain Adaptive Semantic Segmentation

Lin Chen<sup>1,2</sup>, Zhixiang Wei<sup>1</sup>, Xin Jin<sup>3</sup>, Huaian Chen<sup>1</sup>,  
Miao Zheng<sup>2</sup>, Kai Chen<sup>2</sup>, Yi Jin<sup>1</sup>

University of Science and Technology of China<sup>1</sup>  
Shanghai AI Laboratory<sup>2</sup>  
EIT Institute for Advanced Study<sup>3</sup>



上海人工智能实验室  
Shanghai Artificial Intelligence Laboratory




EIT INSTITUTE FOR  
ADVANCED STUDY  
东方理工高等研究院

# Introduction

---


## ■ Motivation

- We find that the region-level based DB-method and class-level based DB-method are complement with each other.

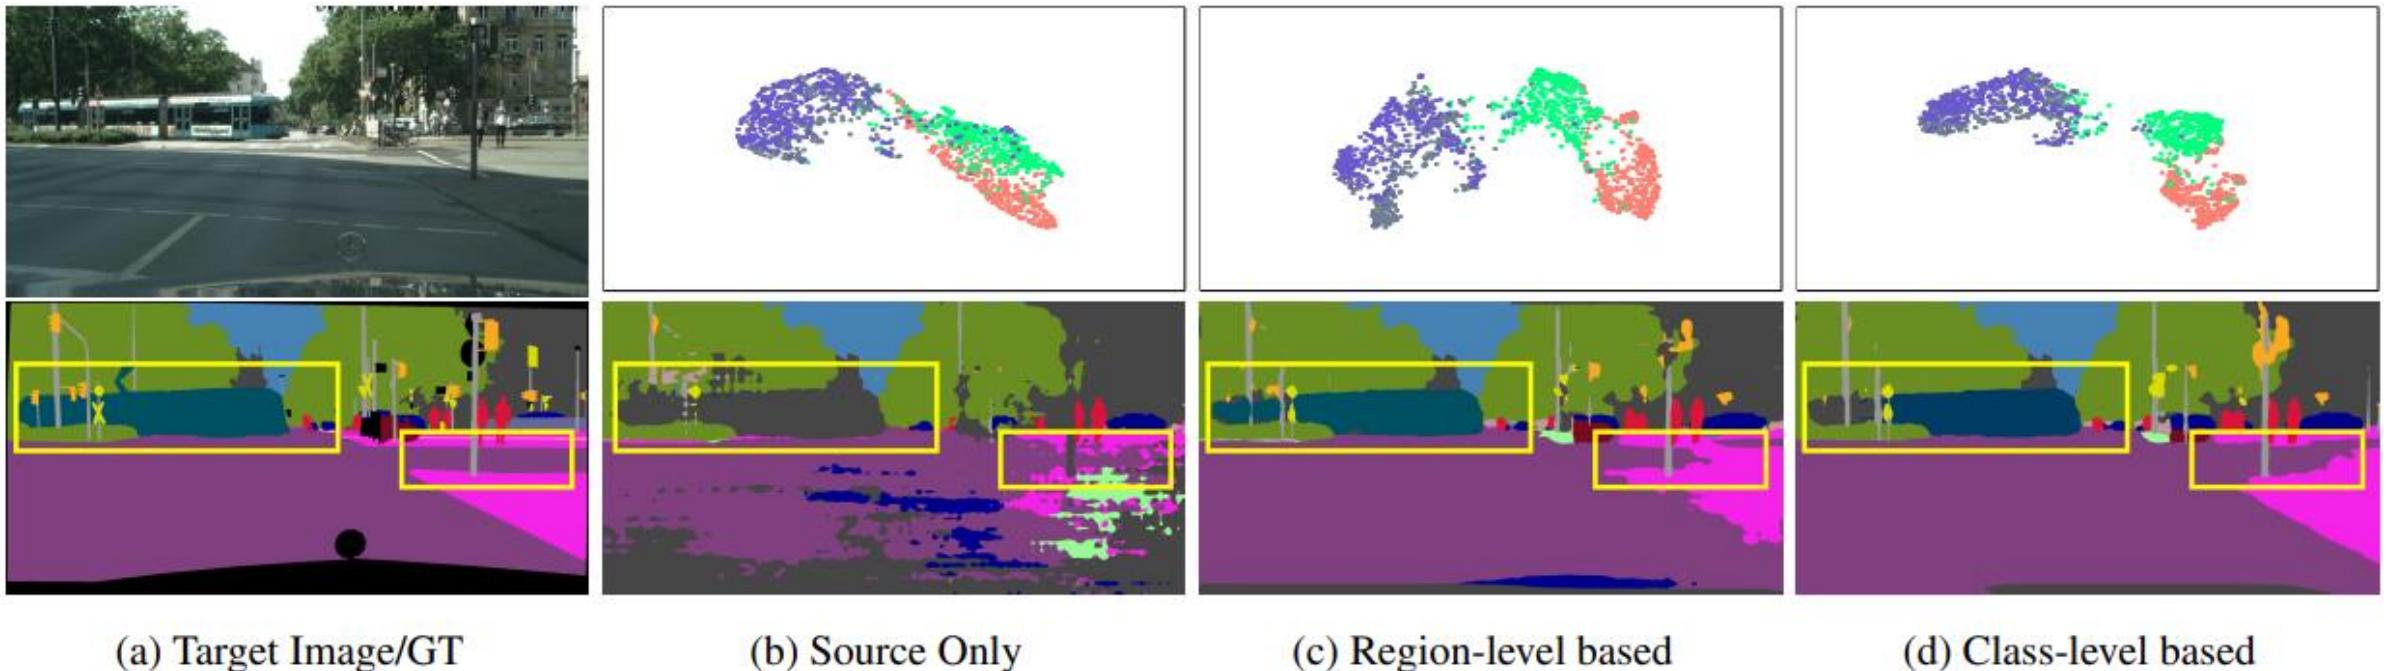

# Methodology

## ■ Deliberated Domain Bridging for DASS

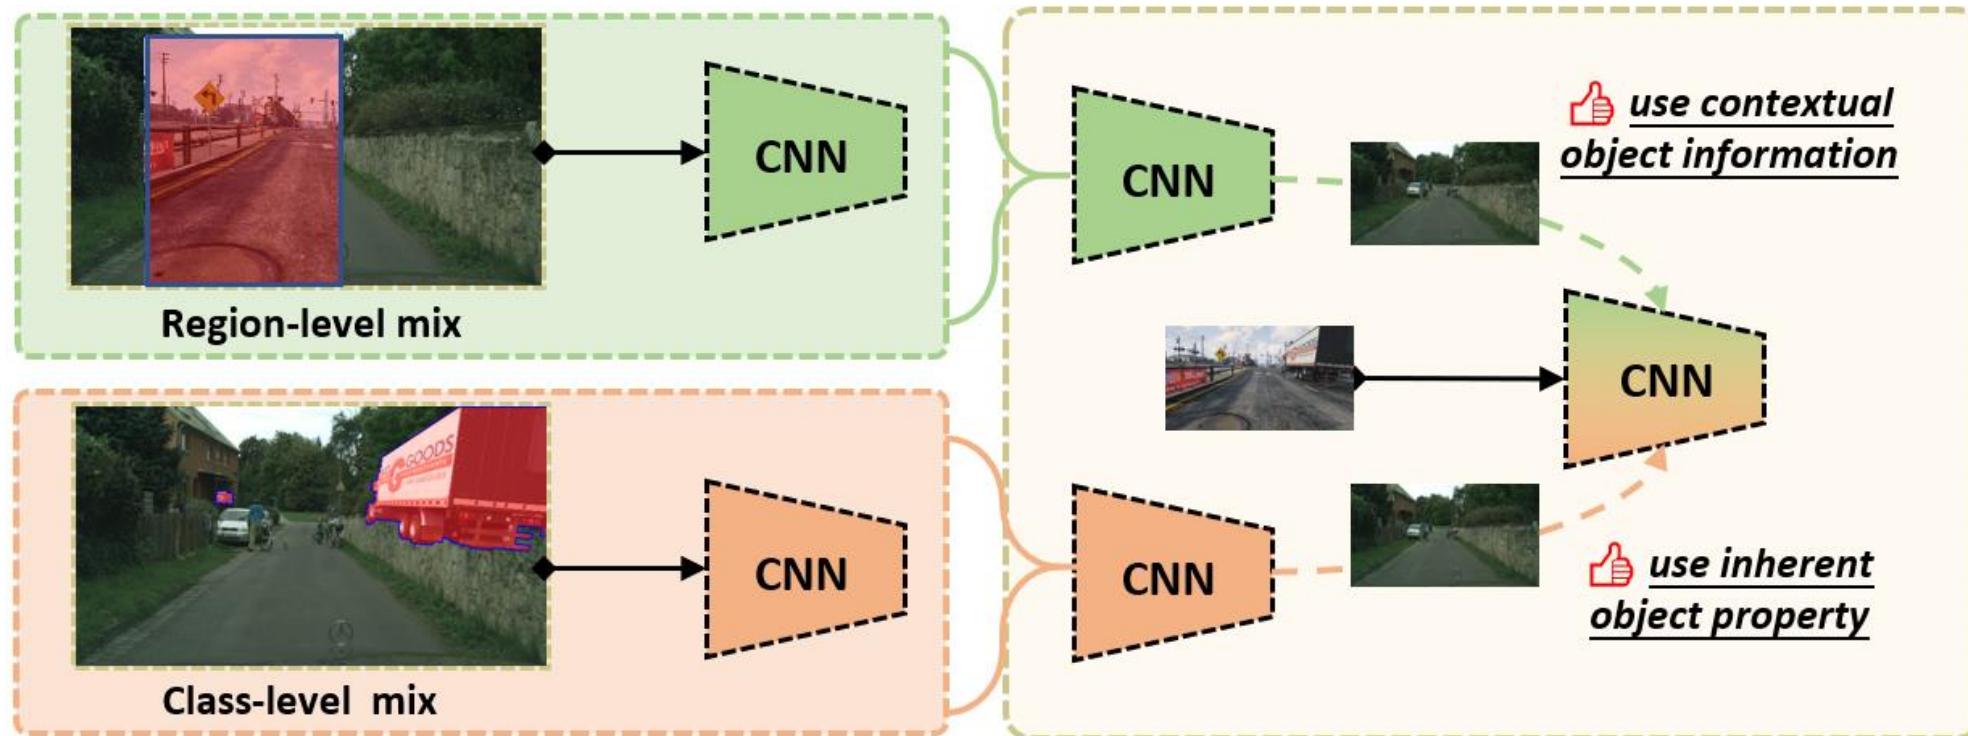

**(a) Step 1: Dual-Path Domain Bridging (DPDB)**

**(b) Step 2: Cross-path Knowledge Distillation (CKD)**



上海人工智能实验室  
Shanghai Artificial Intelligence Laboratory



EIT INSTITUTE FOR  
ADVANCED STUDY  
东方理工高等研究院



NEURAL INFORMATION  
PROCESSING SYSTEMS

# Thanks, Q & A

Corresponding:  
[chlin@mail.ustc.edu.cn](mailto:chlin@mail.ustc.edu.cn)

